

Scope of Application

Applications for products and samples which require strict storage, biological products, electronic and special materials. Can be used for storage and protection of temperature sensitive samples, vaccines, longitudinal study samples, important medical research samples, valuable pharmaceutical products, clinical trial samples and reagent/sample for IVD use.

Products are widely used in hospitals, disease control, CDC, scientific research institutions biomedical engineering institutes, agriculture/fishery companies.

INVERTER



MD-86L838



MD-86L838T

Smarter by Design

Midea Smart-Inverter ULT Freezer are designed to be energy saving. The control system automatically tunes the speed of the compressors to optimize the operation.



Smart-Inverter Technology

Variable speed compressors are coupled in the freezer, the compressors will work based on the loads and inter change fluctuation. The control system automatically tunes the speed of the compressors to optimize the operation.



Low Energy Consumption

Smart-Inverter freezer coupled with environmentally safe and friendly hydrocarbon refrigeration system, allows the freezers to operate at a low level of energy consumption.



High Temperature Stability

The innovative control algorithm balances the effects of temperature loss with the unique frequency conversion refrigeration system, ensuring the cabinet temperature stability.



Active ECO Technology

Midea active ECO technology can significantly reduce energy consumption and maintain good interior temperature uniformity at the same time.

INVERTER



MD-86L838

1 Multi-layer Silicone Sealing Structure

Multi-layers silicone gaskets provide a tight seal between the inner doors and outer door, reducing heat exchange rate and retaining the inner temperature better when there is power failure.



2 Multi-level Alarms

Alarm functions include high, low temperature, sensor error, power failure, high ambient alarm, door open alarm etc.



3 Ingenious Handle Design

Ingenious handle design helps you easy to open and close door easier. Lockable handle safeguards your precious samples. Padlock can also be added for extra sample safety.



4 Maximum Samples Storage

Optimized dimension design provides maximum inner space for 40,000.pcs 2ml vial.

5 USB Interface

Enables users to download historical temperature data for compliance/auditing purposes.


6 Heated Pressure Equalization Port

It allows users to re-open the main door quickly when entering, rust-proof, freeze-free.




Midea Active ECO Technology is applied to all Midea ULT freezer, which means all the products default to run in ECO mode. Based on ECO technology, the compressors performance based on the loads or temperature change.


The control system automatically tunes the speed of the compressors to optimize the operation. So, Midea Active ECO Technology can significantly reduce energy consumption while maintaining good interior temperature uniformity.

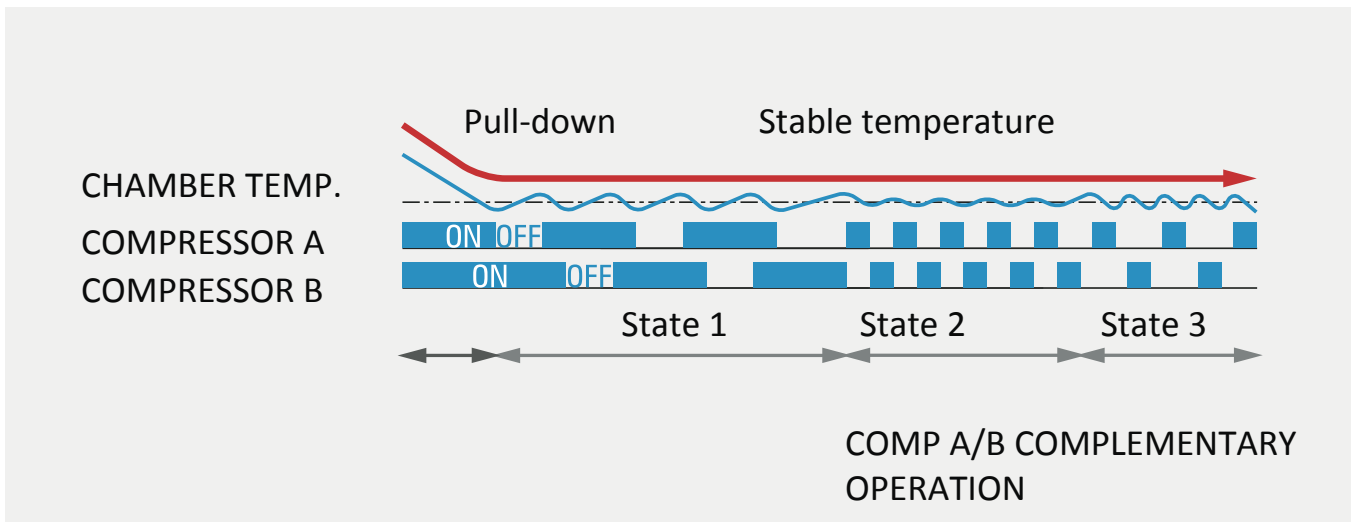

Temperature recover curve

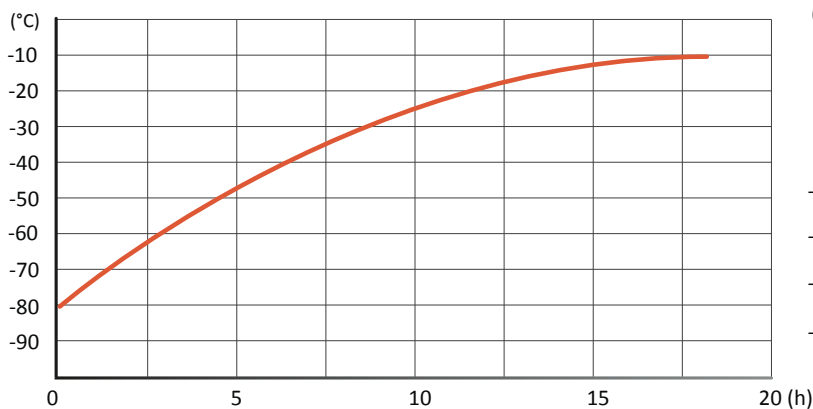

Temperature cool down curve

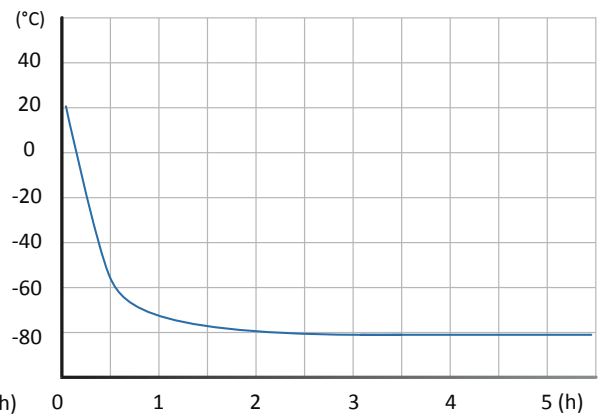



Item	Model No.	MD-86L838	MD-86L838T
Product Image	Product Image		
Technical Data	Cabinet Type	Upright	Upright
	Climate Class	N	N
	Cooling Type	Direct cooling	Direct cooling
	Defrost	Manual	Manual
	Cooling System	Twin Cooling	Twin Cooling
	Refrigerant	Mixed refrigerant	Mixed refrigerant
	Total Storage Volume(L)	858	858
	2ml Cryo Tube Qty	60000	60000
	External Material	High quality coated steel	High quality coated steel
	Inner Material	Stainless steel	Stainless steel
Control	Controller	Microprocessor	Microprocessor
	Display	LED	Touch Screen
	Temperature Accuracy(°C)	0.1	0.1
	Temperature Range	-40~-86°C	-40~-86°C
Dimensions	Product Dimensions(mm)(W x D x H)	1175*995*1990	1175*995*1990
	Interior Dimensions(mm)(W x D x H)	885*720*1310	885*720*1310
Electrical Data	Power Supply	220~240V /50 ~60HZ	220~240V /50 ~60HZ
Functions	High Temperature Alarm	Y	Y
	Low Temperature Alarm	Y	Y
	Door Ajar	Y	Y
	Power Failure Alarm	Y	Y
	High condenser temperature alarm	Y	Y
	High ambient Temperature Alarm	Y	Y
	Low Battery	Y	Y
	Sensor Failure alarm	Y	Y
	USB Interface	Y	Y
	Door Heating	Y	Y
	Porthole	Y	Y
	Universal Wheel	Y	Y
Caster	Y	Y	

All specifications are subject to change without prior notice.